

# Technical Specification Sheet

## UNIVERSAL CIRCUIT BREAKER LOCKOUT X2/X3

**Material:** ABS Metal foldable screw

**Locking holes:** 01

**Accepts shackle up to:** 8.5mm

**Weight:** 19 gm

**Foldable screw:** length 54mm, foldable length 25mm, thickness 3.7mm

**Size:** Height 55mm, Width 25mm, Depth 18mm

**MCB Toggle locking curve 10mm**

Universal Circuit Breaker Lockout is used to isolate the electrical energy to procure the electrical hazardous situation, applicable only when the energy source is in switched OFF position. Rust resistant screws.

Device can be installed manually by loosing the screw

X2/X3 type no tool required fix à on MCB, sighten the screw and fold it at 45°ongle further set lock and tag by an authorized person.



Suitable to lockout single/double/three pole operating handle circuit breaker

Nose is used to fill the gap between operating handle and fixed point in OFF position for better grip and proper lockout.



**LS - BR 16**

## Installation

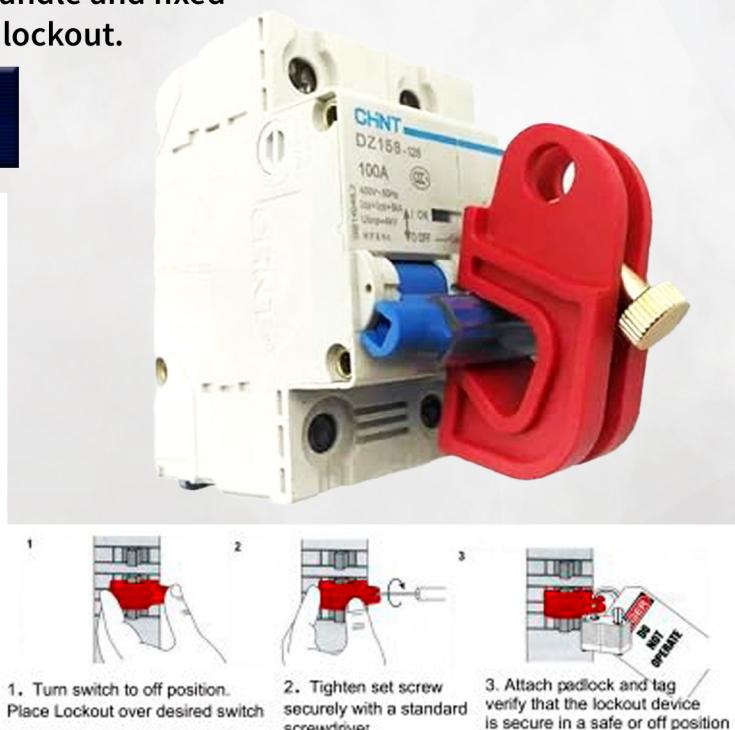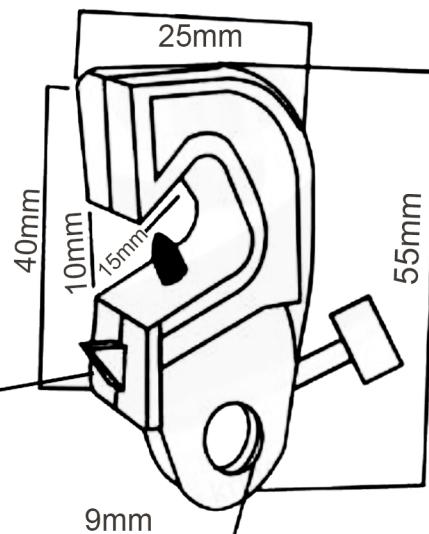

ITEM CODE	DESCRIPTION	WEIGHT
LS-BR16	FOLDABLE SCREW + NOSE - X2 TYPE	19 GM
LS-BR18	ALL FOUR TYPE SET X, X1, X2, X3	62 GM



**THADHANI**<sup>®</sup>  
The Experts in Safety... Since 1947

**J.THADHANI & CO.**

New #12/ Old #28, Stringers Street,  
Chennai - 600001, Tamilnadu, India.



044 - 4262 5223  
info@thadhanisafety.com  
www.thadhanisafety.com