

# Technical Specification Sheet

## UNIVERSAL CIRCUIT BREAKER LOCKOUT (CURVATURE SHAPE)

**Material:** ABS + Metal screw

**Locking holes:** 01

**Accepts shackle up to:** 8mm

**Weight:** 6.5 gm

**Non foldable screw:** length 11.4mm, thickness 4.9mm

**Size:** Height 45mm Width 25mm Depth 10mm

**MCB toggle locking curve** 10mm



Circuit Breaker Lockout is used to isolate the electrical energy to procure the electrical hazardous situation, applicable only when the energy source is in switched OFF situation.

Device can be installed manually by switching OFF the breaker then loosening the screw (with screw driver) fix it on MCB, tighten the screw further set lock and tag by an authorized person. Suitable to lockout single/double/three pole operating handle circuit breaker.



**LS - BR19**

## Intallation

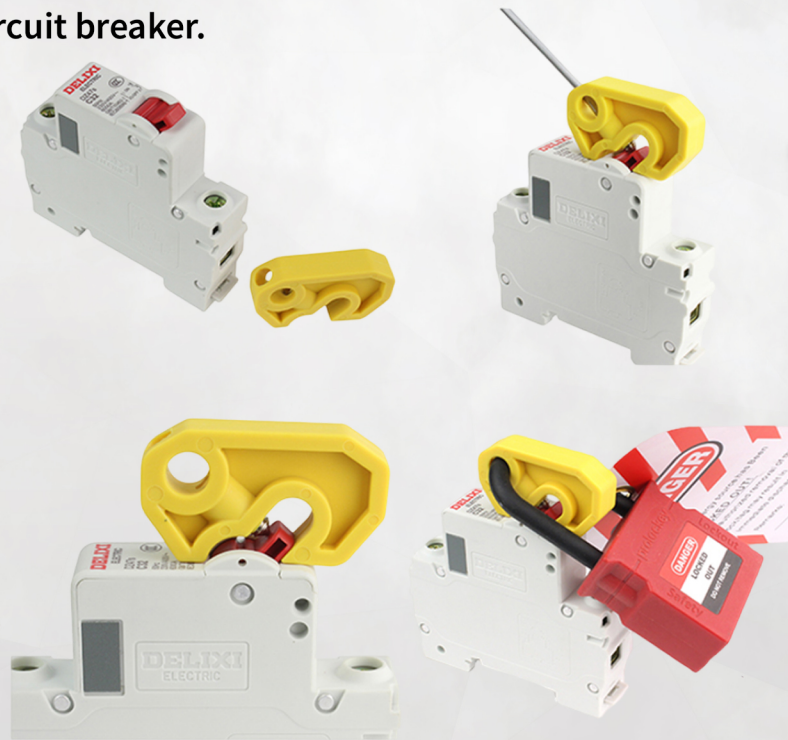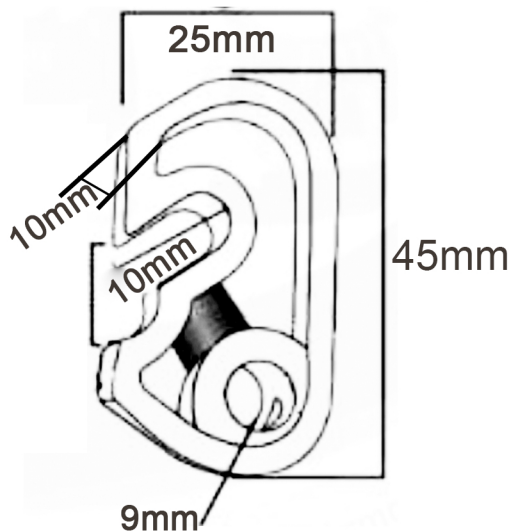

| ITEM CODE | DESCRIPTION                   | WEIGHT |
|-----------|-------------------------------|--------|
| LS-BR19   | NORMAL SCREW SMALL, CURVATURE | 6.5 GM |
|           |                               |        |
|           |                               |        |



**THADHANI**<sup>®</sup>  
The Experts in Safety... Since 1947

**J.THADHANI & CO.**

New #12/ Old #28, Stringers Street,  
Chennai - 600001, Tamilnadu, India.



044 - 4262 5223

info@thadhanisafety.com

www.thadhanisafety.com