

# Technical Specification Sheet

## MINIATURE CIRCUIT BREAKER LOCKOUT (CURVATURE SHAPE)

**Material:** ABS + Metal screw

**Locking holes:** 01

**Accepts shackle up to:** 8.6mm

**Weight:** 18.5 gm

**Foldable screw:** length 54mm, foldable length 25mm,  
thickness 3.7mm

**Size:** Height 59mm Width 13.8mm

MCB operator locking curve 8.5 mm

Circuit Breaker Lockout is used to isolate the electrical energy to procure the electrical hazardous situation, applicable only when the energy source is in switched OFF situation.


Device can be installed manually by switching OFF the breaker then loosening the screw (require No extra tool in foldable screw) fix it on MCB, tighten the screw and fold it at 45° angle further set lock and tag by an authorized person.

Suitable to lockout single/double/three pole operating handle circuit breaker.



LS - BR20

## Intallation

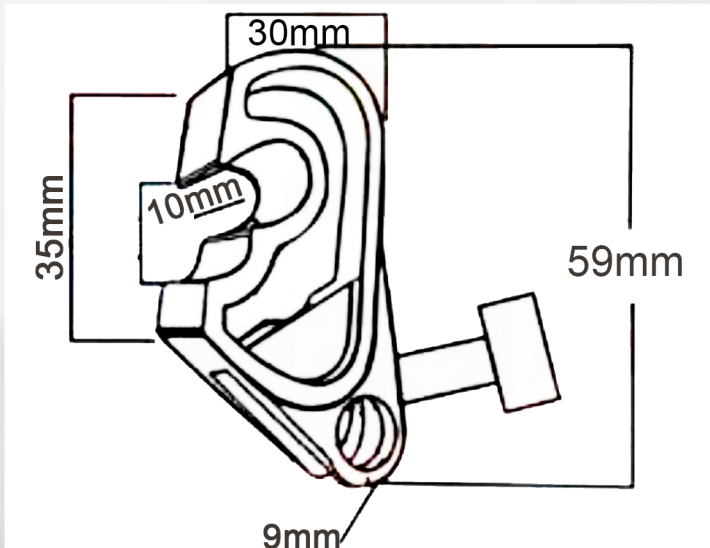

ITEM CODE	DESCRIPTION	WEIGHT
LS-BR20	FOLDABLE SCREW BIG, CURVATURE	18.5 GM



**THADHANI**<sup>®</sup>  
The Experts in Safety... Since 1947

**J.THADHANI & CO.**

New #12/ Old #28, Stringers Street,  
Chennai - 600001, Tamilnadu, India.



044 - 4262 5223



info@thadhanisafety.com



www.thadhanisafety.com