

Technical Specification Sheet

CIRCUIT BREAKER LOCKOUT (BLUE)

Material: ABS + Metal screw

Locking holes: 01

Accepts shackle up to: 9mm

Weight: 15.5/23mm

Size: Height: 65mm Width: 26mm Depth: 22mm

MBC Toggle locking curve 12mm

Non foldable screw: length 19.4mm, thickness 3.8mm

Used to isolate the MCB hence prevent accidental switching ON the device, can be installed only in switched OFF position.

Device can be installed manually by switching OFF the breaker then loosening the screw [Require tool in normal screw/No extra tool needed in foldable screw] fix it on MCB, tighten the screw and fold it at 45° angle further set lock and tag by an authorized person.


Rust resistant screws.

Suitable to lockout single/double/three/four pole operating handle circuit breaker.



LS - BR 23N

Intallation

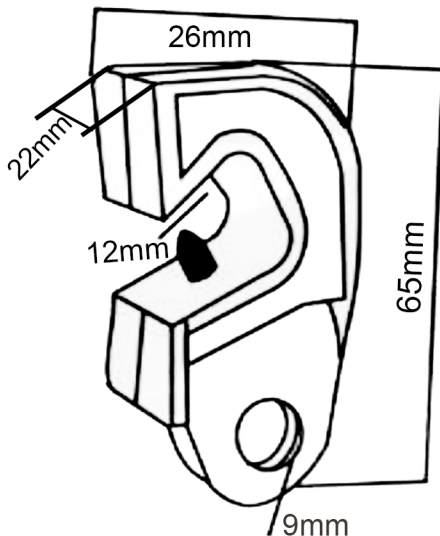

ITEM CODE	DESCRIPTION	WEIGHT
LS-BR23N	BIG : WITHOUT NOSE, NORMAL SCREW	15.5 GM



THADHANI[®]
The Experts in Safety... Since 1947

J.THADHANI & CO.

New #12/ Old #28, Stringers Street,
Chennai - 600001, Tamilnadu, India.



044 - 4262 5223



info@thadhanisafety.com



www.thadhanisafety.com