

Technical Specification Sheet

DUAL SIDED CIRCUIT BREAKER LOCKOUT

Material: ABS + Metal screw

Locking holes: 01

Accepts shackle up to: 8mm

Weight: 18gm

One side small normal screw: length 11.4mm, thickness 4.9mm

Other side large normal screw: length 19.4mm, thickness 3.8mm

Size: Height: 57mm Width: 50mm Depth: 12mm


MCB toggle locking curve: at one side 18mm/another wide side 22mm

To isolate and lockout the electrical device by loosening the screw with screwdriver fix it on MCB, tighten the screw further set lock and tag by an authorized person. Device is ideal to use on multiple MCB's and main switches. Two opposite sides are having two different clearances that can lockout several sizes of circuit breaker operating handle.



LS - BR26

Intallation

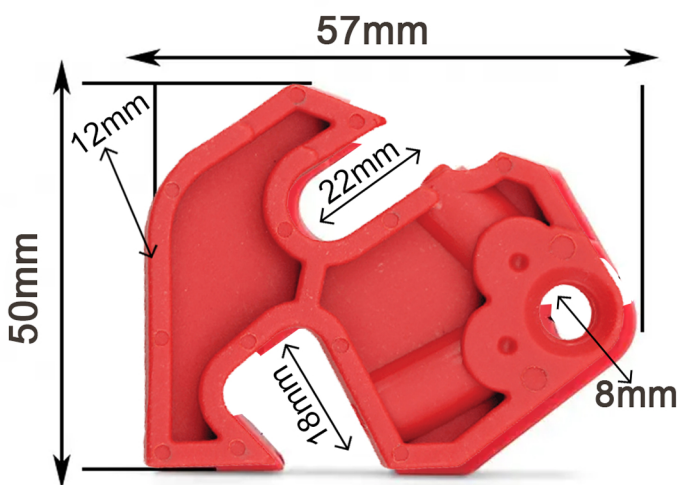

ITEM CODE	DESCRIPTION	WEIGHT
LS-BR26	2 SIDED NORMAL SCREW	18GM



THADHANI[®]
The Experts in Safety... Since 1947

J.THADHANI & CO.

New #12/ Old #28, Stringers Street,
Chennai - 600001, Tamilnadu, India.



044 - 4262 5223



info@thadhanisafety.com



www.thadhanisafety.com