

# Technical Specification Sheet

## FLEXIBLE CABLE LOCKOUT

**Material:** ABS & insulated steel cable.

**Accepts shackle maximum up to:** 7mm

**Locking arrangement:** Cable length: provided 2mtr. along with a device Or can be customize 5m, 10m, 20mtr or more as per the demand.


**Cable thickness:** 5mm

**Outer diameter:** 47.9mm

Cable insertion slot 6mm


### Advantages:

1. All purpose highly durable, flexible, strong and corrosion resistant insul lockout device is ideal to be used in wet or cold climate, highly resistant to solvent and other chemical products, resist cracking, abra
2. Ideal to lockout Electrical as well as mechanical devices like oversized switches and connectors.
3. Can install perfectly, OPEN/LOCK by using extra tool provided.
4. Willistonds temperatures ranging from -20°C 55

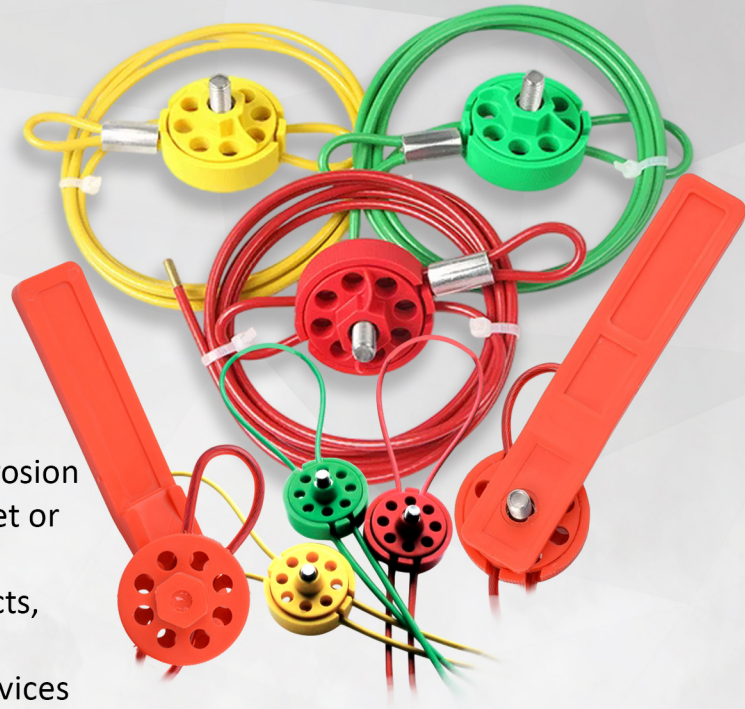

LS - C46

## Intallation

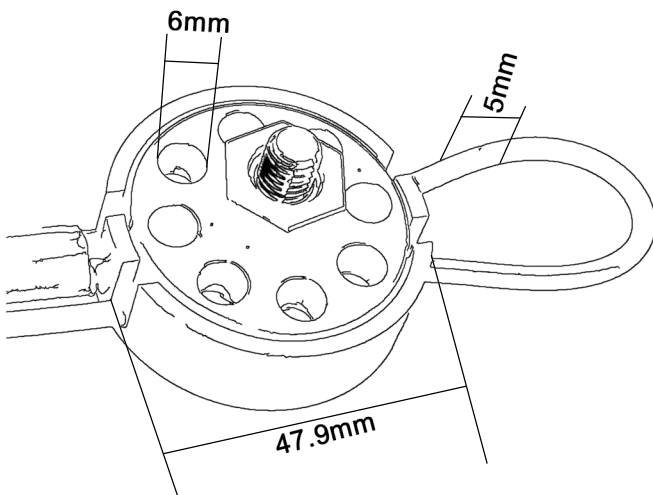

ITEM CODE	TYPE	DESCRIPTION	WEIGHT
LS-C42/43	ABS & INSULATED STEEL CABLE	ROUND BODY WITHOUT CABLE RED/YELLOW	36GM
LS-C44/45	ABS & INSULATED STEEL CABLE	ROUND BODY WITHOUT CABLE-GREEN/BLUE	36GM
LS-C46	ABS & INSULATED STEEL CABLE	FLEXIBLE CABLE LOCKOUT + 2 MTR. CABLE	100GM
LS-C47	ABS & INSULATED STEEL CABLE	FLEXIBLE CABLE LOCKOUT + 2 MTR. CABLE + 1 TIGHTENING HANDLE	135GM



**THADHANI**<sup>®</sup>  
The Experts in Safety... Since 1947

**J.THADHANI & CO.**

New #12/ Old #28, Stringers Street,  
Chennai - 600001, Tamilnadu, India.



**044 - 4262 5223**



[info@thadhanisafety.com](mailto:info@thadhanisafety.com)



[www.thadhanisafety.com](http://www.thadhanisafety.com)