

Technical Specification Sheet

ADJUSTABLE CABLE LOCKOUT

Material: ABS & insulated steel cable.

Accepts shackle maximum up to: 8mm

Locking arrangement: 5 numbers for group isolation.

Weight: 155gm

Cable length: provided 2mtr, along with a device or can be customize 5mtr, 10mtr, 20mtr or more as per the demand.

Cable thickness: 5mm.


Advantages:

1. Shock, wear and rust resistant with highly durable, flexible, strong insulated lockout device is Ideal to be used in wet or cold climate, highly resistant to solvent and other chemical products, resist cracking, abrasion.
2. Ideal to lockout Electrical as well as mechanical devices like oversized valves, switches and connectors.
3. Withstands temperatures ranging from -50°C to 125°C



LS - C56

Intallation

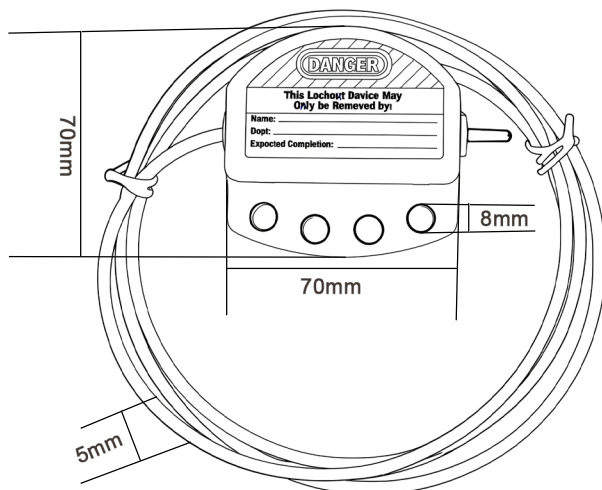

| ITEM CODE | TYPE | DESCRIPTION | WEIGHT |
|-----------|-----------------------------|--------------------------|--------|
| LS-C56 | ABS & INSULATED STEEL CABLE | ADJUSTABLE CABLE LOCKOUT | 155GM |



THADHANI[®]
The Experts in Safety... Since 1947

J.THADHANI & CO.

New #12/ Old #28, Stringers Street,
Chennai - 600001, Tamilnadu, India.



044 - 4262 5223



info@thadhanisafety.com



www.thadhanisafety.com