

Technical Specification Sheet

SAFETY LOCKOUT HASP POWDER COATED

Material: MS + fully powder coated body

Complete length: 25mm

Jaw: 151.7mm (10 hole)/166mm (12 hole)

Width: 39mm,

Thickness: 2mm

Jaw Size: Available in jaw dia 25 mm

Accepts shackle maximum up to: 9.5mm

Locking holes: 10/12 numbers to provide group isolation


Weight: 25mm Jaw: 102gm (10 hole)/112.5gm (12 hole) Two extra small holes provided at the edges to hang the tags with the help of a cable tie.

Advantage: Used to lockout electrical as well as mechanical devices while perform servicing, maintenance or cleaning activities



LS - H42

Installation

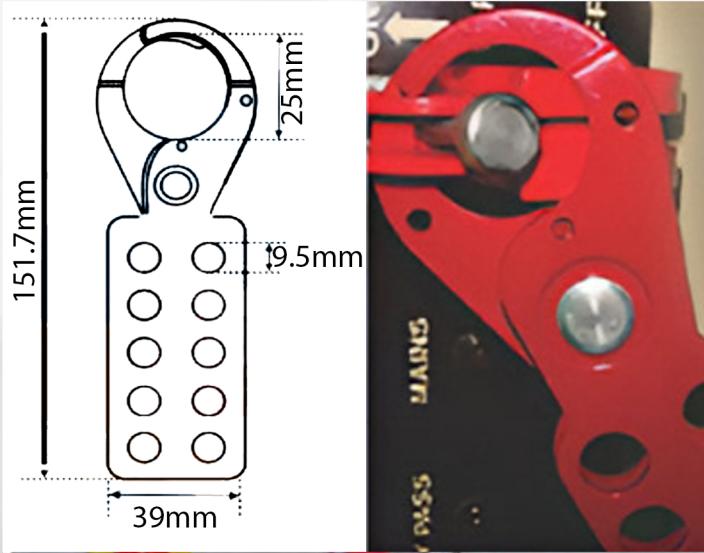

INSTALLATION METHOD:

For locking shutdown the equipment



Disconnect it by other sources of energy



slide the arm outside



place it inside the locking point



push the arm inside



now place the lock and tag for lockout

ITEM CODE	DESCRIPTION	HOLES	WEIGHT
LS-H42	JAW SIZE 25MM	10	102 GM



THADHANI[®]
The Experts in Safety... Since 1947

J.THADHANI & CO.

New #12/ Old #28, Stringers Street,
Chennai - 600001, Tamilnadu, India.



044 - 4262 5223

info@thadhanisafety.com

www.thadhanisafety.com