

Technical Specification Sheet

PNEUMATIC LOCKOUT

Material: ABS

Locking holes: 2 number each sides

Weight: 23gm Accepts shackle maximum up to: 8mm

Sizes:

Type C: 11.70mm, Type D: 12.50mm, Type E: 15.50mm

Middle: 20.40mm

Can isolate pneumatic power without installing a direct interlocking valve. Cost reducing, more convenient.


The lock can be connected with an external thread coupler to realize isolation of the equipment from all compressed air sources. The center hole of the lock can be used to store an air hose permanent

The side ring can be used to hang the hose and the lock.

Can use a padlock with a shackle diameter of 6.4mm or 7.1mm for Lockout purpose.


Suitable for most 6.4mm, 9.5mm and 12.7mm external thread connectors

Three way locking arrangement on each side.

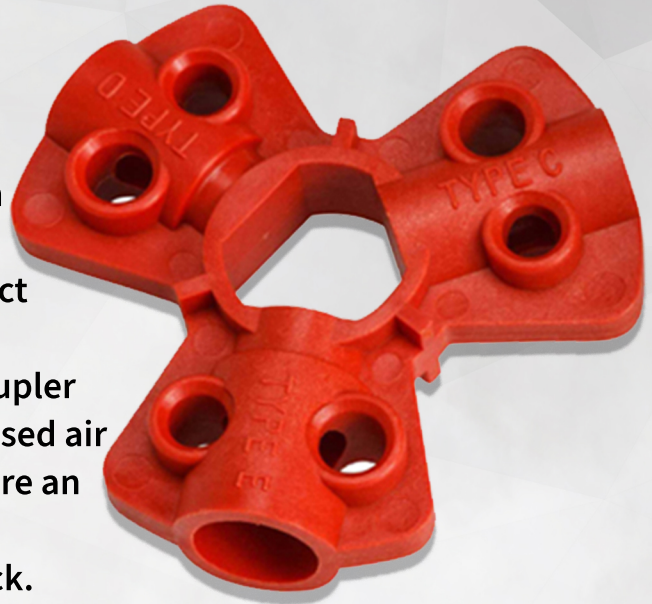

LS-PL90

Intallation

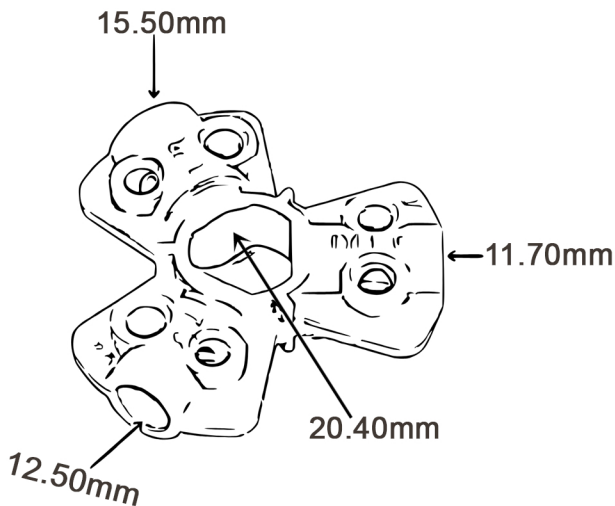

ITEM CODE	DESCRIPTION	WEIGHT
LS-PL90	PNEUMATIC LOCKOUT	23GM