

Technical Specification Sheet

PLUG VALVE LOCKOUT

Material: Polypropylene

Locking holes: 1 numbers, loto hasp can be used for group isolation.

Size: Upper part Height: 100mm Width (Dia):80mm

Lower part internal Dia for valve: 63mm

Lower metal part Dia: 110mm

Accepts shackle maximum up to: 9mm

Available in four different sizes to lockout numerous ball valves.

Having three parts base, clamp and cap.

Advantage:

This device is very efficient, inexpensive and safe.


Withstands temperatures ranging from -25° to 200°F.

Handy and convenient to install.



Intallation

LS - PV65

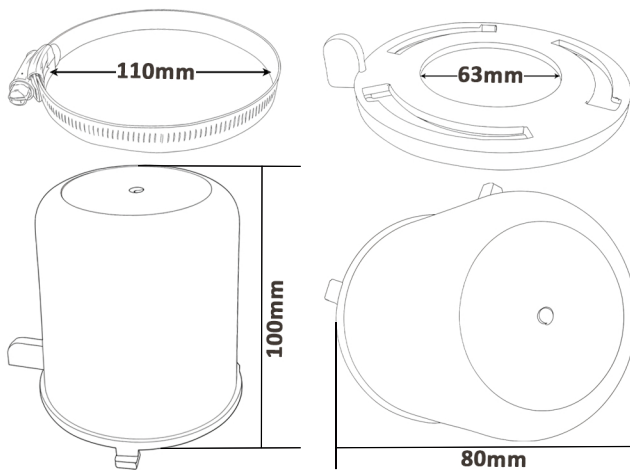

ITEM CODE	TYPE	SIZE
LS-PV62	A TYPE	SUITABLE FOR VALVE STEMS WITH A DIAMETER OF 22 MM
LS-PV63	B TYPE	SUITABLE FOR VALVE STEMS WITH A DIAMETER BETWEEN 23 MM AND 34.9 MM
LS-PV64	C TYPE	SUITABLE FOR VALVE STEMS WITH A DIAMETER BETWEEN 44 MM AND 53.9 MM
LS-PV65	D TYPE	SUITABLE FOR VALVE STEMS WITH A DIAMETER BETWEEN 55 MM AND 63.5 MM



THADHANI[®]
The Experts in Safety... Since 1947

J.THADHANI & CO.

New #12/ Old #28, Stringers Street,
Chennai - 600001, Tamilnadu, India.



044 - 4262 5223



info@thadhanisafety.com



www.thadhanisafety.com