Technical Specification Sheet

SCAFFOLD TAG RED



LOTO Tags-Paper/Plastic/Synthetic

LS-177 "Do not use scaffold Erection and inspection Record Scaffolding insertion tog

- **Size:** Length 193mm, width 91mm, thickness 0.4mm (±10%)
- **Material:** Polyester Or Plastic
- **Weight:** 6.5gm
- **Thickness:** 0.4mm (±10%)
- **Size:** length 91mm X 193mm, Diameter of eyelet 7.6mm
- **Application:** it can be use in scaffold holder for scaffold areas
- **Advantage:**

a. Weather and tear proof, oil resistant.

b. Re-writeable and musable.

c. Main utilization of Tagout system is to communicate safety and lockout information like Danger, Caution and Do not attempt to operate Or Out of service any switch, valve, or other energy isolating device bearing a padlock.

d. Customize tags hence we can make the design/opplication specific display an application specific messages in the preferred language like English, Hindi etc.

LS - T77

Intallation

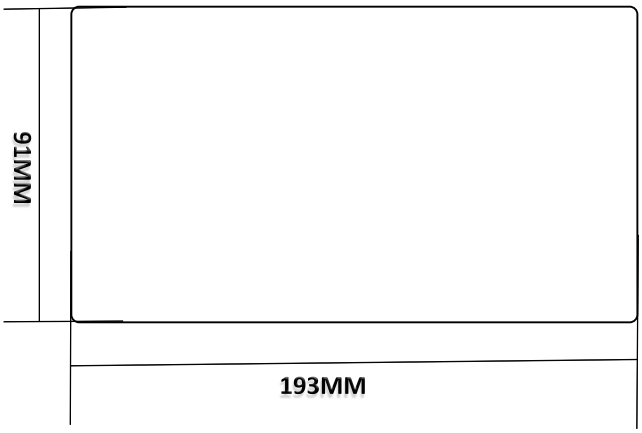



Single/dual/Numerous color combination

Content/Size can be modify as per requirement

WE CAN MAKE CUSTOMIZED TAGS AND HOLDERS ALSO AS YOUR CHOICE.....

THADHANI®
The Experts in Safety... Since 1947

J.THADHANI & CO.

New #12/ Old #28, Stringers Street,
Chennai - 600001, Tamilnadu, India.

044 - 4262 5223
info@thadhanisafety.com
www.thadhanisafety.com