

# Technical Specification Sheet

## UNIVERSAL VALVE LOCKOUT

**Material:** ABS/PP, Mild stainless steel part, SS sheet and Spring, PU

**Locking holes:** 4 numbers. Front Jaw/grip 19mm X 28mm


**Device full length:** 166mm

**Accepts shackle maximum up to:** 9mm


Can used to lockout gate valve, ball valve and butterfly valve of numerous sizes.

**Application:**

1. Lockout large levers, T-handles and other hard to secure mechanical devices.
2. With the help of cable attachment we can lockout the gate valves.
3. And attaching the clamp with butterfly valve handle we can prevent unexpected activation.
4. And can be used to lockout perpendicular/OFF ball valves along with the single/dual arms.

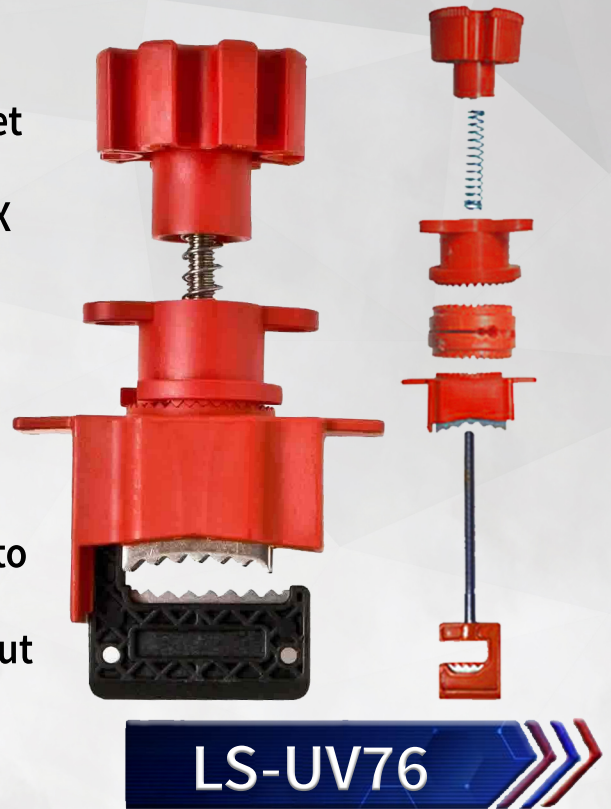

## Intallation

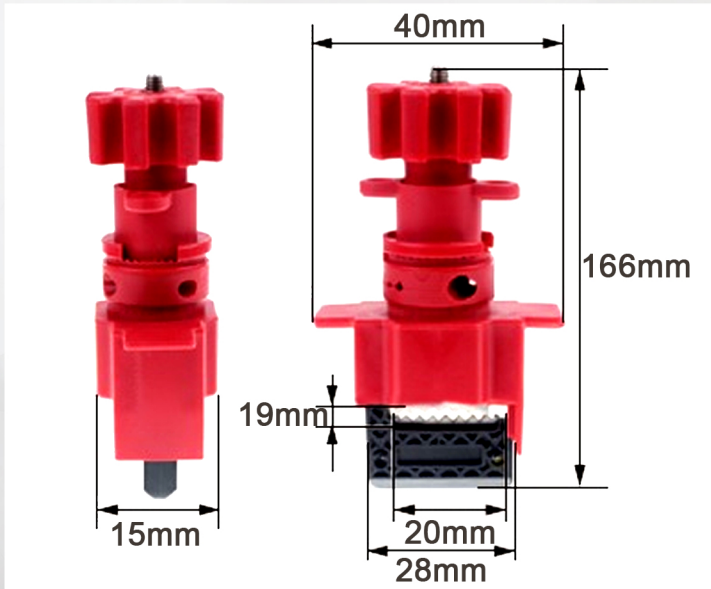

ITEM CODE	TYPE	SIZE	WEIGHT
LS-UV76	VALVE LOCKOUT-LOWER JAW MADE OF METALLIC TEETH TO GRIP ON VALVE	BODY LENGTH 166MM	158GM



**THADHANI**<sup>®</sup>  
The Experts in Safety... Since 1947

**J.THADHANI & CO.**

New #12/ Old #28, Stringers Street,  
Chennai - 600001, Tamilnadu, India.



044 - 4262 5223



info@thadhanisafety.com



www.thadhanisafety.com