

# Technical Specification Sheet

## UNIVERSAL VALVE LOCKOUT

**Material:** ABS/PP, Mild stainless steel part,  
SS sheet and Spring, PU

**Locking holes:** 4 numbers.

**Teeth Front Jaw/grip** 19mm X 28mm

**Device full length:** 166mm

**Small Arm:** Length 158mm Width 53mm Depth 11mm


**Rod Length:** 116mm Rod thickness 9.8mm

**Accepts shackle maximum up to:** 9mm

Can used to lockout gate valve, ball valve and butterfly valve of numerous sizes.



### Application:

1. Lockout large levers, T-handles and other hard to secure mechanical devices.
2. With the help of cable attachment we can lockout the gate valves.
3. And attaching the clamp with butterfly valve handle we can prevent unexpected activation.
4. And can be used to lockout perpendicular/OFF ball valves along with the single/dual arms.

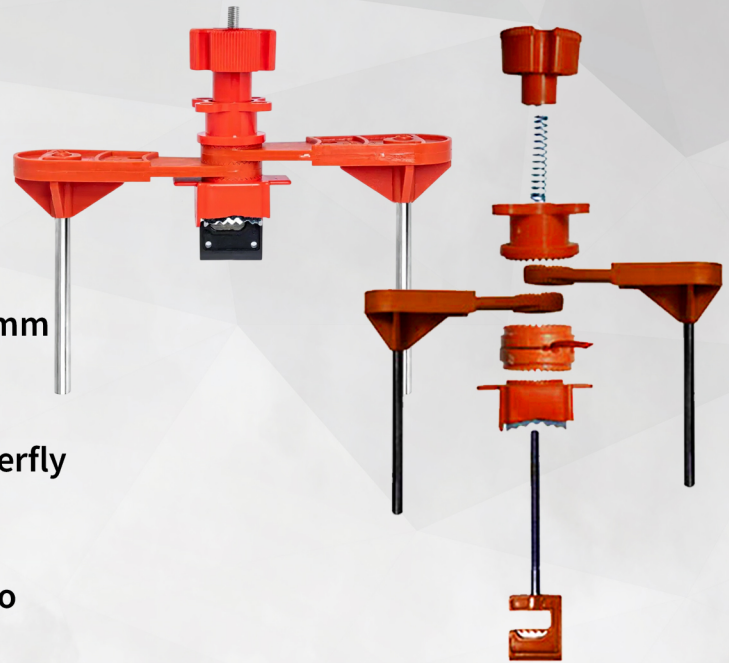

LS-UV79

## Intallation

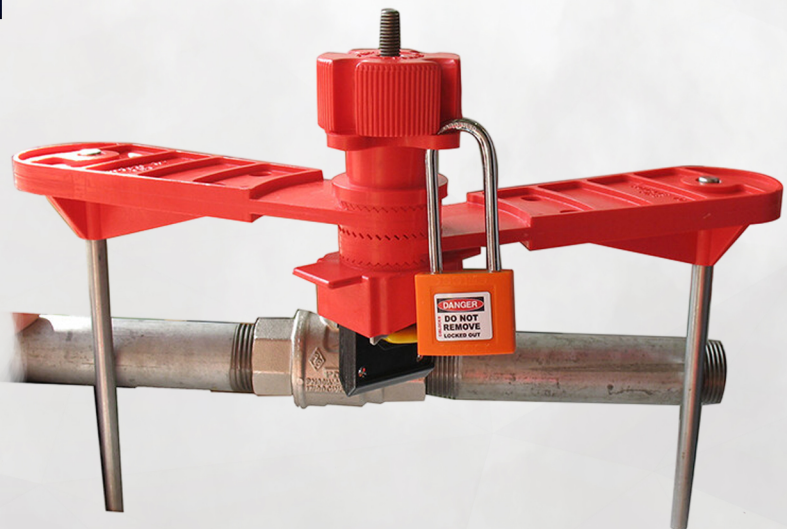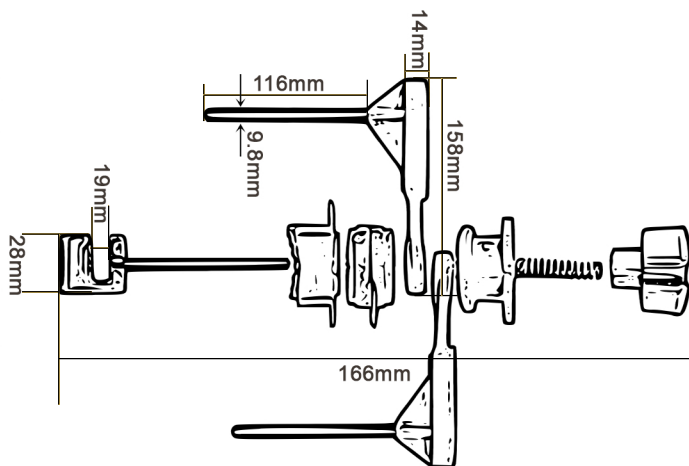

ITEM CODE	TYPE	SIZE	WEIGHT
LS-UV79	VALVE LOCKOUT WITH DUAL ARMS	DEVICE FULL LENGTH: 166MM DUAL SMALL ARM LENGTH 158MM WIDTH 53MM DEPTH 14MM ROD LENGTH: 116MM ROD THICKNESS 9.8MM	544GM



**THADHANI**<sup>®</sup>  
The Experts in Safety... Since 1947

J.THADHANI & CO.

New #12/ Old #28, Stringers Street,  
Chennai - 600001, Tamilnadu, India.



044 - 4262 5223



info@thadhanisafety.com



www.thadhanisafety.com