

# Technical Specification Sheet

## UNIVERSAL VALVE LOCKOUT

**Material :** ABS / P \* P , Mild stainless steel part, SS sheet and Spring, PU

**Locking holes:** 4 numbers.

Teeth Front Jaw/grip 19mm X 28mm

**Device full length:** 166mm

**Large Arm:** Length 204mm Width 55mm Depth 11mm

**Rod Length:** 170mm Rod thickness 9.8mm

**Accepts shackle maximum up to:** 9mm

Can used to lockout gate valve, ball valve and butterfly valve of numerous sizes.


### Application:

1. Lockout large levers, T-handles and other hard to secure mechanical devices.
2. With the help of cable attachment we can lockout the gate valves.
3. And attaching the clamp with butterfly valve handle we can prevent unexpected activation.
4. And can be used to lockout perpendicular/OFF ball valves along with the single/dual arms.



**LS-UV80**

## Installation

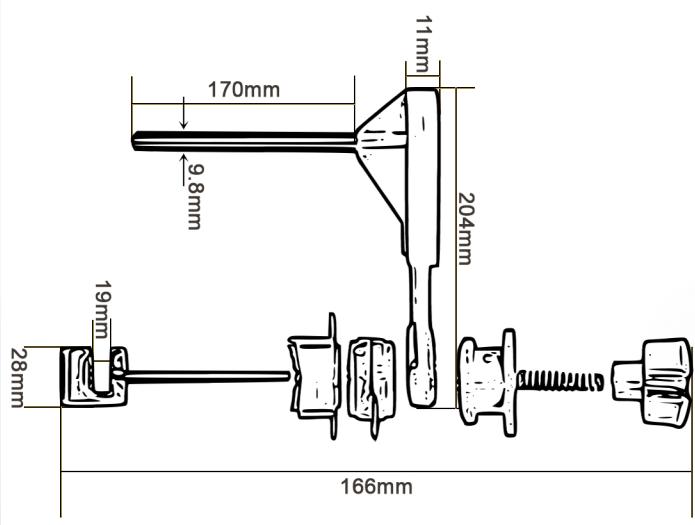

ITEM CODE	TYPE	SIZE	WEIGHT
LS-UV80	VALVE LOCKOUT WITH SINGLE LARGE ARM	DEVICE FULL LENGTH: 100MM LARGE ARM LENGTH 204MM WIDTH 55MM DEPTH 11MM ROD LENGTH EX0MM ROO THICKNESS BAA0MM	410GM



**THADHANI**<sup>®</sup>  
The Experts in Safety... Since 1947

**J.THADHANI & CO.**

New #12/ Old #28, Stringers Street,  
Chennai - 600001, Tamilnadu, India.



044 - 4262 5223  
info@thadhanisafety.com  
www.thadhanisafety.com