Technical Specification Sheet

UNIVERSAL VALVE LOCKOUT

Material: ABS/PP, Mild stainless steel part, SS sheet and

Spring, PU

Locking holes: 4 numbers.

Teeth Front Jaw/grip 19mm X 28mm

Device full length: 166mm

Double Large Arms: Lenght 204mm Width 55mm Depth 11mm

Rod Length: 170mm Rod thickness 9.8mm Accepts shackle maximum up to: 9mm

Can used to lockout gate valve, ball valve and butterfly valve

of numerous sizes.

Application:


1. Lockout large levers, T-handles and other hard to secure mechanical devices.

- 2. With the help of cable attachment we can lockout the gate valves.
- 3. And attaching the clamp with butterfly valve handle we can prevent unexpected activation.
- 4. And can be used to lockout perpendicular/Off ball valves along with the single/dual arms.







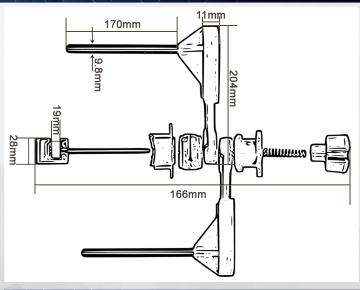



ITEM CODE	ТҮРЕ	SIZE	WEIGHT
LS-UV81	VALVE LOCKOUT-WITH DUAL LARGE ARMS	DEVICE FULL LENGTH: 156MM LARGE ARM LENGHT 204MM	663GM
		WIDTH 55MM DEPTH TIMM ROD LENGTH: 170MM ROO THICKNESS BAMM	



J.THADHANI & CO.

New #12/ Old #28, Stringers Street, Chennai - 600001, Tamilnadu, India.



044 - 4262 5223

