

Technical Specification Sheet

UNIVERSAL VALVE LOCKOUT

Material: ABS/PP, Mild stainless steel part, SS sheet and Spring, PU

Locking holes: 4 numbers. Teeth Front Jaw/grip 19mm X 28mm

Device full length: 166mm

Small Arm: Length 158mm Width 53mm Depth 14mm

Rod Length: 116mm Rod thickness 9.8mm

Cable length: 2 mtr. that can also customize as per the necessity.

Accepts shackle maximum up to: 9mm Can used to lockout gate valve, ball valve and butterfly valve of numerous sizes.


Application:

1. Lockout large levers, T-handles and other hard to secure mechanical devices.
2. With the help of cable attachment we can lockout the gate valves.
3. And attaching the clamp with butterfly valve handle we can prevent unexpected activation.
4. And can be used to lockout perpendicular/OFF ball valves along with the single/dual arms.



LS-UV82

Intallation

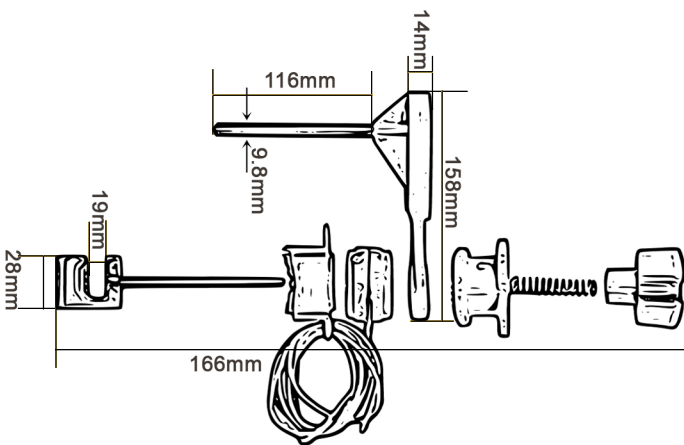

ITEM CODE	TYPE	SIZE	WEIGHT
LS-UV82	VALVE LOCKOUT WITH SINGLE ARM WITH 2 MTR, INCULATED CABLE	DEVICE FULL LENGTH: 106MM SMALL ARM LENGTH 158MM WIDTH 53MM DEPTH 14MM ROD LENGTH: 116MM ROD THICKNESS 9.8MM	425GM



THADHANI[®]
The Experts in Safety... Since 1947

J. THADHANI & CO.

New #12/ Old #28, Stringers Street,
Chennai - 600001, Tamilnadu, India.



044 - 4262 5223



info@thadhanisafety.com



www.thadhanisafety.com