

Technical Specification Sheet

UNIVERSAL VALVE LOCKOUT

Material: ABS/PP, Mild stainless steel part, SS sheet and Spring, PU

Locking holes: 4 numbers. Teeth Front Jaw/grip

19mm X 28mm Device full length: 166mm


Dual Small Arms: Length 158mm Width 53mm Depth 14mm

Rod Length: 116mm Rod thickness 9.8mm

Cable length: 2 mtr, that can also customize as per the necessity Accepts shackle maximum up to: 9mm Can used to lockout gate valve, ball valve and butterfly valve of numerous sizes.


Application:

1. Lockout large levers, T-handles and other hard to secure mechanical devices.
2. With the help of cable attachment we can lockout the gate valves.
3. And attaching the clamp with butterfly valve handle we can prevent unexpected activation.
4. And can be used to lockout perpendicular/OFF ball valves along with the single/dual arms.

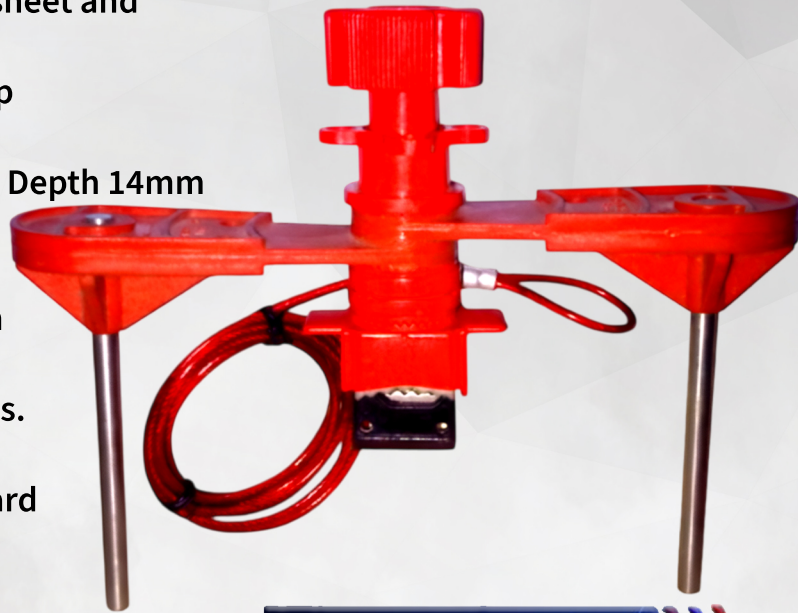

LS-UV84

Intallation

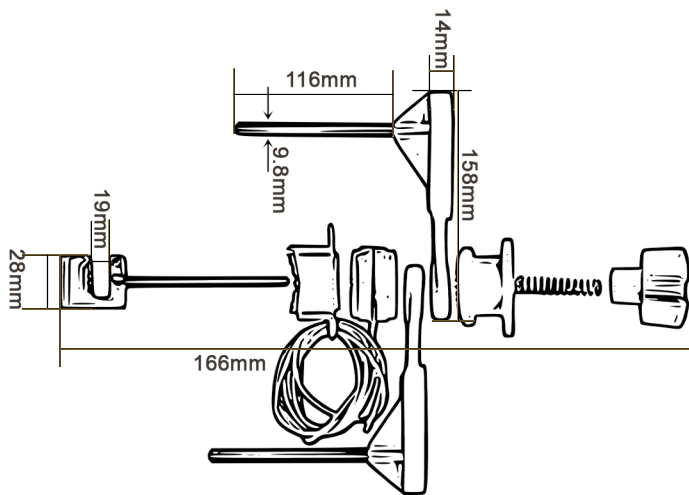

ITEM CODE	TYPE	SIZE	WEIGHT
LS-UV84	VALVE LOCKOUT WITH DUAL ARMS WITH 2 MTR, INCULATED CABLE	DEVICE FULL LENGTH: 150MM SMALL ARMS LENGHT 158MM WIDTH 53MM DEPTH 14MM ROD LENGTH:TIAMM ROO THICKNESS 9.8MM	615GM



THADHANI[®]
The Experts in Safety... Since 1947

J.THADHANI & CO.

New #12/ Old #28, Stringers Street,
Chennai - 600001, Tamilnadu, India.



044 - 4262 5223

info@thadhanisafety.com

www.thadhanisafety.com