

Technical Specification Sheet

UNIVERSAL VALVE LOCKOUT

Material: ABS/PP, Mild stainless steel

Small Arm: Length 158mm Width 53mm

Depth 14mm

Rod Length: 116mm Rod thickness 9.8mm

Accepts shackle maximum up to: 9mm

Can used to lockout gate valve, ball valve and butterfly valve of numerous sizes.


Application:

1. Lockout large levers, T-handles and other hard to secure mechanical devices.
2. With the help of cable attachment we can lockout the gate valves.
3. And attaching the clamp with butterfly valve handle we can prevent unexpected activation.
4. And can be used to lockout perpendicular/OFF ball valves along with the single/dual arms.



LS-UV86

Intallation

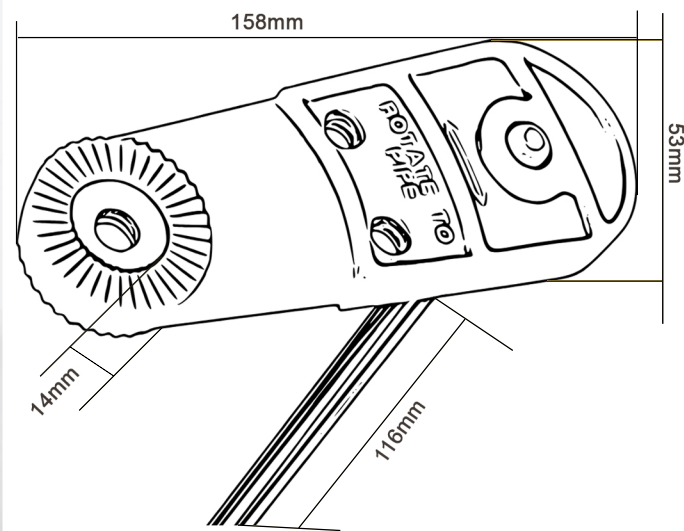

ITEM CODE	TYPE	SIZE	WEIGHT
LS-UV86	SINGLE SMALL ARM	SMALL ARM: LENGHT 158MM WIDTH 53MM DEPTH 14MM ROD LENGTH:16MM ROD THICKNESS 9.8MM	193GM



THADHANI[®]
The Experts in Safety... Since 1947

J.THADHANI & CO.

New #12/ Old #28, Stringers Street,
Chennai - 600001, Tamilnadu, India.



044 - 4262 5223



info@thadhanisafety.com



www.thadhanisafety.com