



ALUMINISED FACE SHIELD

CERTIFICATION : FABRIC- EN 11612:2015;
VISOR- EN 171, EN 166
HELMET- IS 2925:1984;

INDUSTRY	
Metal	Oil & Gas
Mining	Cement
Automotive	Heavy Engineering
Power Distribution	Construction

SPECIAL FEATURES			
 IFR	 LIGHT WEIGHT	 FLEXIBLE	 DURABLE

HEATX

Outer Shell
EN ISO 11612:2015

A1 B1 C3 D3 E3 F1

Inner Shell
EN ISO 11612:2015

A1 B1 C1 E3 F1

FRP Helmet
IS 2925:1984


Visor
 
CE
0196



MODEL DESCRIPTION
Window panel for easy insert of gold coated visor
Window size 150X250X1mm
Available with integrated helmet inserting slot
Suitable for gold, clear visor
Suitable for any types of FRP helmet

MARKING
Manufacturer Logo, Model No., Fabric Composition, Certification, Size

STYLE	FABRIC COMPOSITION	TRIM	ACCESSORIES
Hood	Outer shell: 100% Aluminized Para-aramid (480g/m ² +5%) Inner shell: 100% Treated FR Cotton 350 g/m ²	<ul style="list-style-type: none"> 100% Para-aramid Thread FR Velcro 	<ul style="list-style-type: none"> FRP Helmet Gold coated Visor

FEATURES
Skin friendly fabric
Protection against molten metal
Protection against high radiation heat
FR performance will remain same during the working life
The hi-tech fabric will not cause any itchiness, stiffness

APPLICATIONS
Metal Foundries & smelting operations
Pot Room & Blast Furnace
Casting, Forging & heat treating
Metal Fabrication & Foundry Equipment Maintenance
Energy & Utilities



ALUMINISED FACE SHIELD

Description

Aluminized workwear are important part of our Personal Protective Equipment(PPE) plan for workers exposed to molten metal splash or radiant heat. These are primary protective clothing designed to reflect radiant heat and protect workers from burns when working in high temperature environments.

These are made from woven fabrics including a FR base fabric, layers of Aluminium. This kit consists with :

- Jacket
- Trousers
- 14" Hand Gloves
- 14" Leg-guard
- Hood with Helmet and Mica Visor
- Storage Bag

INDUSTRY	
Metal	Oil & Gas
Mining	Cement
Automotive	Heavy Engineering
Power Distribution	Construction

SPECIAL FEATURES

 IFR	 LIGHT WEIGHT	 FLEXIBLE	 DURABLE
---	--	--	---

FEATURES

Skin friendly fabric
Protection against molten metal
Protection against high radiation heat
FR performance will remain same during the working life
The hi-tech fabric will not cause any itchiness, stiffness

STORAGE

May be stored in the dark for upto 2 years
Do not store in direct/high heat or sunlight at this may distort the properties of the fabric
Can be stored and transported in their original cartons at ambient temperature



Outer Shell
EN ISO 11612:2015



A1 B1 C3 D3 E3 F1

Inner Shell
EN ISO 11612:2015



A1 B1 C1 F1

EN 388 : 2016



ABCDEF
1X43FX

EN 407:2021



ABCDEF
424342

FRP Helmet
IS 2925:1984



APPLICATIONS

Metal Foundries & smelting operations
Pot Room & Blast Furnace
Casting, Forging & heat treating
Metal Fabrication & Foundry Equipment Maintenance
Energy & Utilities



STORAGE

May be stored in the dark for upto 2 years

Do not store in direct/high heat or sunlight at this may distort the properties of the fabric

Can be stored and transported in their original cartons at ambient temperature

FABRIC COMPOSITION


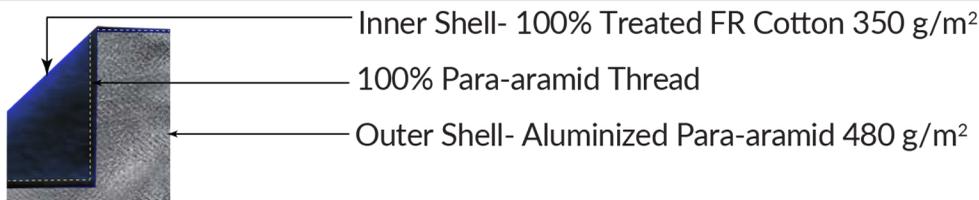


DIAGRAM OF VISOR



SPECIAL FEATURES

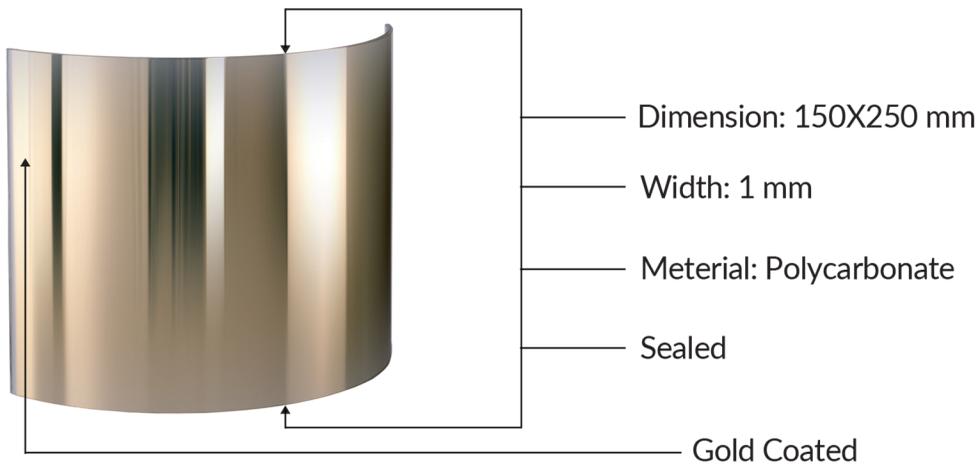


Scratch
Resistance



Anti-fog

DIAGRAM OF HELMET

Thermoguard 9001LRX

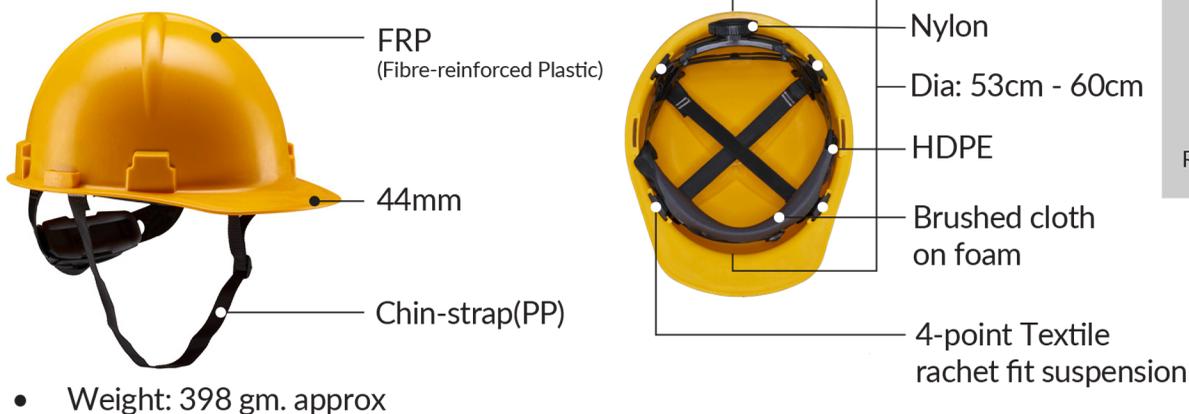

SPECIAL FEATURES



Protection
against
Radiant heat



Impact
Resistance



Crack
Resistance

COLOUR	CLEANING		PACKING
 Silver	Hood: <ul style="list-style-type: none"> Cleaned dry with a soft brush. 	Visor: <ul style="list-style-type: none"> Clean with soft cloth Do not use solvents or abrasives 	1 set per packet

EN ISO 11612:2015 - OUTER SHELL

CODE	INSPECTION CHARACTERISTIC	STANDARD	LEVELS
A	Limited Flame spread	ISO 15025	1 (Lowest 1, Highest 3)
B	Convective Heat	ISO 9151	1 (Lowest 1, Highest 3)
C	Radiant Heat	ISO 6942	3 (Lowest 1, Highest 4)
D	Liquid Molten Aluminium	ISO 9185	3 (Lowest 1, Highest 3)
E	Liquid Molten Iron	ISO 9185	3 (Lowest 1, Highest 3)
F	Contact Heat	ISO 12127	1 (Lowest 1, Highest 3)

EN ISO 11612:2015 - INNER SHELL

CODE	INSPECTION CHARACTERISTIC	STANDARD	LEVELS
A	Limited Flame spread	ISO 15025	1 (Lowest 1, Highest 3)
B	Convective Heat	ISO 9151	1 (Lowest 1, Highest 3)
C	Radiant Heat	ISO 6942	1 (Lowest 1, Highest 4)
E	Liquid Molten Iron	ISO 9185	3 (Lowest 1, Highest 3)
F	Contact Heat	ISO 12127	1 (Lowest 1, Highest 3)

CARE AND MAINTENANCE

- Chlorine bleach should never be used, this can change in the properties for which the manufacturer can assume no liability.
- Store the Aluminized hood by hanging dry in a well ventilated area out of direct sunlight.
- Hood for protection of close approach towards molten metals only.
- The life of hood depends on use & exposure.
- Rubbing against rough or sharp edges is particularly harmful to the outer layer.
- Rough handling, folding and abrasion should be avoided.



THADHANI[®]
The Experts in Safety... Since 1947

J.THADHANI & CO.

New #12/ Old #28, Stringers Street,
Chennai - 600001, Tamilnadu, India.



044 - 4262 5223



info@thadhanisafety.com



www.thadhanisafety.com