

DuPont™ Tyvek® 400

Original name: Tyvek®



Frock

TY210SWHXX003000

TY210SWHXX0030VP MD-4X

Serged seams Collar Snap closure



Shirt

TY303SWHXX005000 SM-7X

TY303SWHXX0012G1

MD-4X

TY303SWHXX0050VP MD-3X

Serged seams Collar Snap closure Long sleeve



Frock

TY211SWHXX003000

Serged seams Collar Snap closure Elastic wrists Knee length SM-7X



Pants

TY350SWHXX005000

SM-7X

TY350SWHXX0012G1 MD-4X

TY350SWHXX0050VP MD-3X

Serged seams



Elastic waist



TY216SWHXX003000

Serged seams Mandarin collar Snap closure Elastic wrists SM-5X



Apron

TY273BWHXX010000

TY273BWHXX0100VP

Bound seams Bound neck & ties Bib style 28" x 36" One size fits most



Only NF option codes are USMCA/TAA compliant.

Seams and closures have less barrier than fabric.

Serged and/or bound seams are degraded by some hazardous liquid chemicals, such as strong acids, and should not be worn when these chemicals are present.

TY127S

Note: Not all sizes available in all styles.

Warning: Tyvek* should not be used around heat, flames, sparks or in potentially flammable or explosive environments. Garments made of Tyvek® fabrics should have slip-resistant or anti-slip materials on the outer surface of boots, shoe covers, or other garment surfaces in conditions where slipping could occur.

Certain accessory items are also identified as make to order. Stock/make to order designations are based on sales volume and production efficiencies. Therefore, designations are subject to change without notice.

Lab coat

TY212SWHXX003000 SM-7X

TY212SWHXX0008G1 MD-4X

TY212SWHXX0030VP MD-4X

TY212SWHXX0030NF SM-5X

USMCA/TAA COMPLIANT

Serged seams Collar Snap closure Two pockets



Sleeves

TY500SWHXX020000

TY500SWHXX0200NF

USMCA/TAA COMPLIANT

Serged seams Elastic openings 18" length One size fits most



Hood

TY657SWHXX010000

Serged seams Pullover Elastic face opening Shoulder length One size fits most





Level of protection



DuPont™ Tyvek® 400

Original name: Tyvek®



Coverall

TY120SWHXX002500 MD-7X

TY120SWHXX0006G1 MD-4X

TY120SWHXX0025VP MD-7X

TY120SWHXX0025NF MD-7X

★ USMCA/TAA COMPLIANT

Serged seams Collar Zipper closure Storm flap Elastic waist Comfort fit design



Coverall

TY122SWHXX002500 MD-7X

> TY122SWHXX0006G1 MD-4X

TY122SWHXX0025VP MD-7X

TY122SWHXX0025NF MD-7X


★ USMCA/TAA COMPLIANT

Serged seams Attached hood (respirator fit)1 Zipper closure Storm flap Elastic waist

Elastic wrists

Elastic ankles Attached skid-resistant boots

Comfort fit design



USMCA/TAA COMPLIANT Serged seams

TY125SWHXX0025NF

Collar

MD-7X

Zipper closure Storm flap

Elastic waist

Elastic wrists

Elastic ankles

Comfort fit design

Only NF option codes are USMCA/TAA compliant.

¹Respirator fit hoods are designed with a longer zipper, extending to the chin for complete coverage of the neck area. Standard hoods only extend to the neck. See page 7 for photos.

Storm flaps: All standard bound and taped seam coveralls have a single storm flap with a pressuresensitive tape closure. Serged seam coveralls do not have a storm flap.

Seams and closures have less barrier than fabric.

Serged and/or bound seams are degraded by some hazardous liquid chemicals, such as strong acids, and should not be worn when these chemicals are present.

Note: Not all sizes available in all styles.

Warning: Tyvek° should not be used around heat. flames, sparks or in potentially flammable or explosive environments. Garments made of Tyvek* fabrics should have slip-resistant or anti-slip materials on the outer surface of boots, shoe covers, or other garment surfaces in conditions where slipping could occur.

Certain accessory items are also identified as make to order. Stock/make to order designations are based on sales volume and production efficiencies. Therefore, designations are subject to change without notice.



TY121SWHXX0025NS

Serged seams Collar Zipper closure

Storm flap Elastic wrists Elastic ankles

Attached skid-resistant boots



Coverall

TY151SWHXX002500

Serged seams Collar Snap closure XL-4X



An ideal balance of protection, durability and comfort

Comfort fit design allows for a greater range of motion and fewer blowouts

Breathable inherent barrier protection against hazardous dry particles, aerosols and non-hazardous light liquid splash

Excellent abrasion resistance; protects against hazardous particles down to one micron in size

When used with other PPE, can help reduce risk of cross-contamination in pandemic response activities

One garment for many applications:

- · General maintenance/operations
- Microcrystalline silica
- · Lead abatement
- · Environmental cleanup
- Agriculture
- · Asbestos abatement
- Food processing
- Mold remediation
- Spray painting
- · Crime scene investigation
- · Wind turbine manufacturing

Tyvek® 400 is white


G1 = Reduced case quantity

NS = Non-skid material

NF = USMCA/TAA compliant

VP = Vend packed







TY127SWHXX002500 MD-7X

TY127SWHXX0006G1 MD-4X

TY127SWHXX0025VP

TY127SWHXX0025NF MD-7X

USMCA/TAA COMPLIANT

Serged seams Attached hood (respirator fit)1 Zipper closure Storm flap


Elastic waist

Elastic wrists Elastic ankles

Comfort fit design






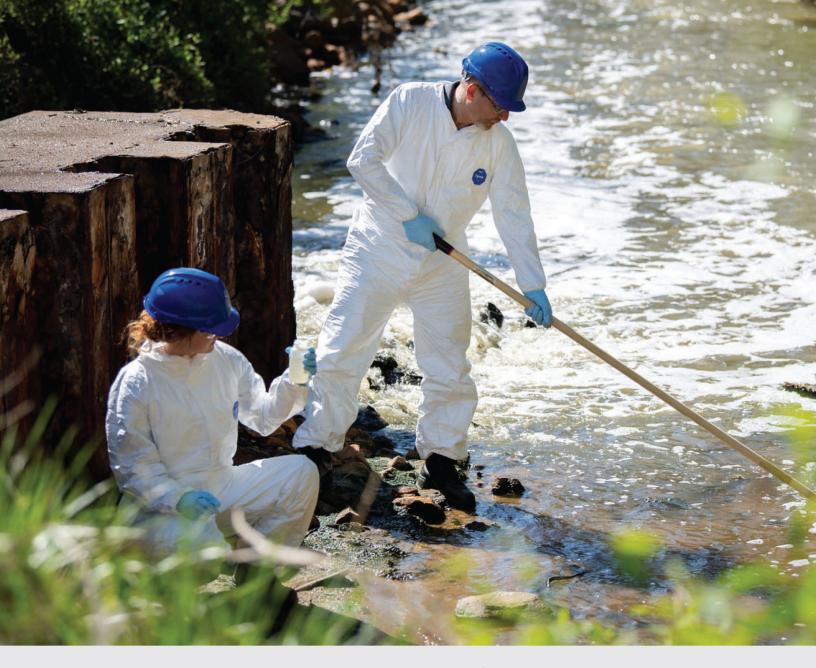



DuPont[™] SafeSPEC[™]—we're here to help

Our powerful web-based tool can assist you with finding the appropriate DuPont garments for chemical, controlled environment, thermal and mechanical hazards. safespec.dupont.com




J.THADHANI & CO.

New #12/Old #28, Stringers Street, Chennai - 600001, Tamilnadu, India.



044 - 4262 5223







Certified Industrial Hygienist team

A DuPont Certified Industrial Hygienist can conduct a job hazard assessment to help you determine the best DuPont garment for a specific hazard.

This information is based upon technical data that DuPont believes to be reliable. It is subject to revision as additional knowledge and experience become available. DuPont does not guarantee results and assumes no obligation or liability in connection with this information. It is the user's responsibility to determine the level of toxicity and the proper personal protective equipment needed. This information is intended for use by persons having the technical expertise to undertake evaluation under their own specific end-use conditions, at their own discretion and risk. Anyone intending to use this information should first check that the garment selected is suitable for the intended use. The end-user should discontinue use of garment if fabric becomes torn, worn or punctured, to avoid potential chemical exposure. Since conditions of use are beyond our control, WE MAKE NO WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE AND ASSUME NO LIABILITY IN CONNECTION WITH ANY USE OF THIS INFORMATION. This information is not intended as a license to operate under or a recommendation to infringe any patent or technical information of DuPont or other persons covering any material or its use. DuPont™, the DuPont Oval Logo, and all trademarks and service marks denoted with ™, ⁵м or ® are owned by affiliates of DuPont de Nemours, Inc. unless otherwise noted. © 2020 DuPont. DSF20_2002-0483_3-1299-400-B (08/20)