

GAS DETECTION OELD

Bluetooth-enabled local display
for Searchline Excel and
Searchpoint Optima Plus



OELD SPECIFICATION

MATERIAL	Marine-grade aluminium alloy or 316 stainless steel with 5-coat painted finish
WEIGHT	Aluminium version 2.3 kg (5 lb), stainless steel version 5.0 kg (11 lb)
DIMENSIONS	159 x 197 x 114 mm (6 ¼ x 7 ¾ x 4 ½ inch)
CABLE ENTRIES	5 x M25 (ATEX/IECEX version) or 5 x ¾" NPT (cULus version). One reserved for sensor connection. 3 blanking plugs supplied for unused entries.
TERMINATION	2 x pluggable rising-clamp type for connection to gas detector and field wiring. Accepts cable sizes of 0.5 to 2.5mm ² , 12 to 28 AWG
STORAGE TEMPERATURE	-40 to +65 °C (-40 to 149 °F)
OPERATIONAL TEMPERATURE	-40 to +65 °C (-40 to 149 °F) -60 to +65 °C (-76 to 149 °F) (CU TR-EX version only)
HUMIDITY	0 to 99% RH (non-condensing)
DISPLAY	LCD module showing digital readout of sensor output, bar chart representation, units of measurement, status icons for alarm, maintenance and active Bluetooth connection. Magnetic switch interface.
CONFIGURABLE DISPLAYED INFORMATION	Displayed information fully user-configurable using the OELD mobile app. Units of measurement selectable from: • %LEL, %VOL, ppm, kppm, mg/m³, g/m³ (point detectors) • LEL.m, ppm.m (open path detectors) • mA, A, dB, DBA (other) Gas name (up to 4 alpha-numeric characters) Measurement range
VISUAL INDICATION	Green/yellow/red/blue multi-colour backlit display for indication of detector and OELD status. Green (normal) indication can be disabled via app.
POWER SUPPLY	18 to 32 Vdc (24 Vdc nominal), <2 W
INTERFACES	Bluetooth® (BLE) non-intrusive connection to suitable mobile device running the OELD mobile app. Range up to 10 m (30 feet) (mobile device dependant) Internal RS-485 connection to Searchpoint Optima Plus or Searchline Excel via SHC-1 through the SHC Protection Device 3 switch magnetic interface using the tool provided
COMPATIBLE GAS DETECTORS	Searchpoint Optima Plus. Searchline Excel, Searchline Excel Cross-Duct, generic 4 to 20 mA devices
ENVIRONMENTAL PROTECTION	IP66 / Type 4X (in accordance with NEMA 250)
CORE APPROVALS	EN 50270: 2015 (EMC) IEC/EN/UL/CSA 61010 (Electrical Safety)



THADHANI
The Experts in Safety... Since 1947

ATEX/IECEX (Ex d version)
DEMKO 16 ATEX 1693X
IECEX [UL 16.0066X]
Ex II 2 GD
Ex db IIC T6
Ex tb IIIC T85 °C
Tamb -40 to +65 °C
EN 60079-29-1 Approved Accessory

ATEX/IECEx (Ex e version)
DEKRA 17 ATEX 0006X
DEK 17.0011X
Ex II 2 GD
Ex eb mb [ia] IIC T5 Gb Ex tb IIIC T100 °C
Tamb -40 to +65 °C
EN 60079-29-1 Approved Accessory

cULus [E484838]
Class I, Div 1, A, B, C & D
Class II, Div 1 F & G, Class III, Div 1
Tamb -55 to +65 °C
Temp Code T6
Class I, Zone 1, AEx d IIC T6
Class I, Zone 21, AEx tb IIIC T6
ISA 60079-29-1

CU TR-Ex (Russian Customs Union), Tamb -60 to +65 °C
Inmetro
NEPSI+
PESO+

SAFETY APPROVALS

MARITIME APPROVALS

Type approved to DNV, BV+, Lloyds+, ABS, EN 60945 (EMC) IEC 60092-504

OTHER APPROVALS

Bluetooth Certified, Radio Equipment Directive (RED), FCC+, country-specific wireless approvals

BLUETOOTH


Certificate-based mutual authentication

COMMUNICATION SECURITY

Encryption to AES128

+Flameproof versions only.

FIELD DIMENSIONS

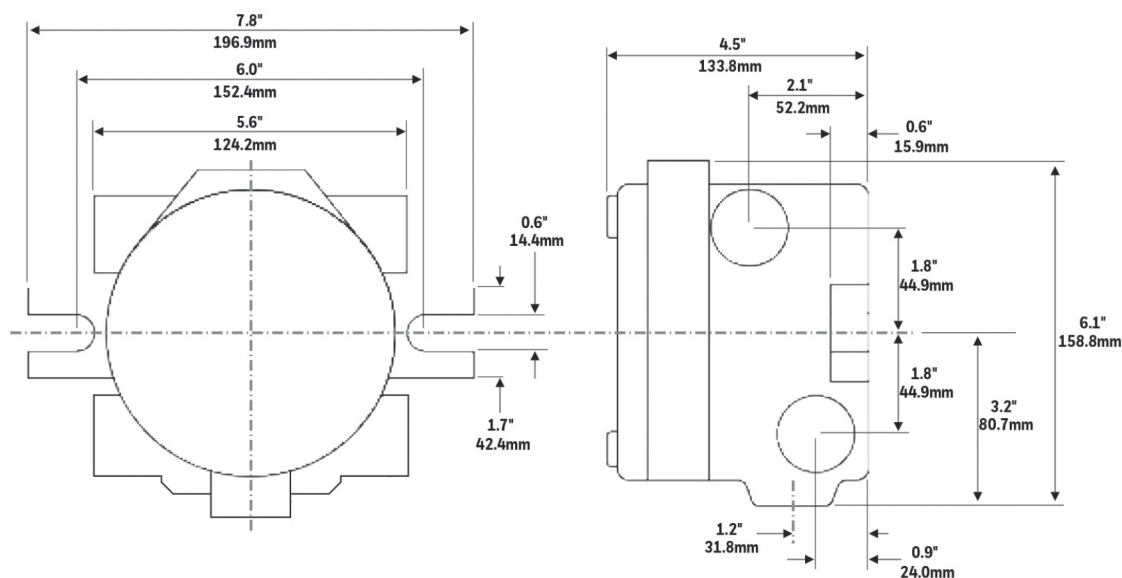

THADHANI[®]
The Experts in Safety... Since 1947

J.THADHANI & CO.

New #12/ Old #28, Stringers Street,
Chennai - 600001, Tamilnadu, India.



044 - 4262 5223

info@thadhanisafety.com

www.thadhanisafety.com

**THE
FUTURE
IS
WHAT
WE
MAKE IT**