


# Safety Containers **SYSBEL** Oily Waste Can



## SYSBEL Oily Waste Cans


A good helper for you to connect oily trashes!

In order to prevent fire risks and collect rags and cloth submersed in oil (flammable solvents, linseed oil and other flammable liquids), please use OSHA standard oily waste can. SYSBEL oily waste can has special lid whose opening angle is no more than 60 degree. The self-closing lid design ensures the can tightly closed in the absence of external force, to effectively control the three elements of fires \*.

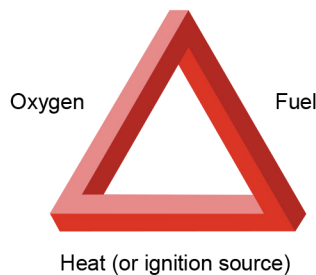

Heat (or ignition source): mechanical electrostatic line damaged, a lighted match or sparked cigarettes, etc
Oxygen: oxygen of air
Fuel: flammable and combustible liquids, such as diesel kerosene, gasoline, etc

Type	For Type
Oily Waste Can	Flashing point ≤ 80 °F (27 °C) Trash immersed in flammable liquids

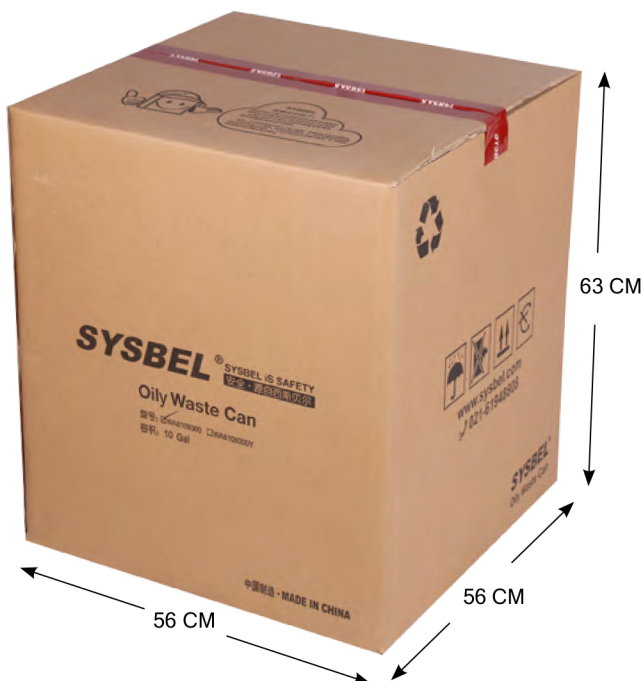

### SYSBEL Oily Waste Cans

Capacity (Gal/L)	Ext. Dimensions (HxD/cm)	Packing Dimensions (HxWxD/cm)	N.W. (Kgs.)	G.W. (Kgs.)	Steel Dolly for Oily Waste Cans(optional)		Model
					Dolly Model	Ext. Dimension (DxH cm)	
21 / 79.3	60 x 47	63 x 56 x 56	10	11.6	WAS0021	49X8	WA8109700



Oily Waste Can Dolly (optional)



**THADHANI**<sup>®</sup>  
The Experts in Safety... Since 1947

**J.THADHANI & CO.**

New #12/ Old #28, Stringers Street,  
Chennai - 600001, Tamilnadu, India.



044 - 4262 5223



info@thadhanisafety.com



www.thadhanisafety.com



## Product details

Maximum lid opening angle is 60 degrees, in accordance with Underwriters Laboratories (UL) safety standards

Unique body and base design of the can to effectively reduce the possibility of fire

The base of the eye to promote air circulation around the tanks, effective heat dissipation



The handle design convenient handling

Eye-catching warning label, facilitate the management, and to distinguish

Pedal switch control, requiring no manual operation



Maximum lid opening angle is 60 degrees

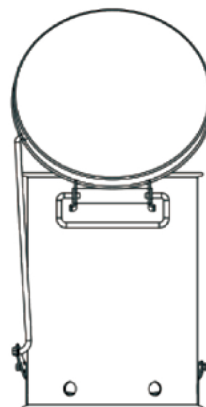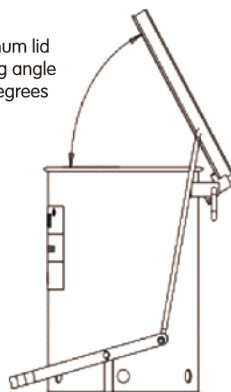

## The oily waste can plays an important role!

1. Pedal switch control, requiring no manual operation
  2. Unique body and base design of the can to effectively reduce the possibility of fire
  3. Maximum lid opening angle is 60 degrees, in accordance with Underwriters Laboratories (UL) safety standards
  4. Scope: Red products for tarnish flammable liquid waste; yellow for tarnish combustible liquid waste
- \*Please refer to P10 for the three elements of fire



**THADHANI<sup>®</sup>**  
The Experts in Safety... Since 1947

**J.THADHANI & CO.**

New #12/ Old #28, Stringers Street,  
Chennai - 600001, Tamilnadu, India.



044 - 4262 5223

info@thadhanisafety.com

www.thadhanisafety.com