




## WATER MONITOR

- BODY : CARBON STEEL WATER WAYS (HOT DIP GALVANIZED)
- SWIVEL JOINT : BRONZE (MANUAL TWIST LOCK) / SS 304
- INLET : FLANGED TO IS:1538 / ANSI B16.5 150 LBS
- OUTLET : MALE BSP THREADED / JET NOZZLE MADE OF ALUM. ALLOY / GUN METAL
- ROTATION : HORIZONTAL 360° , VERTICAL +90° & -45°.
- TEST PRESSURE : 23 KGF/CM<sup>2</sup>
- LOCKING DEVICE FOR HORIZONTAL AND VERTICAL POSITION

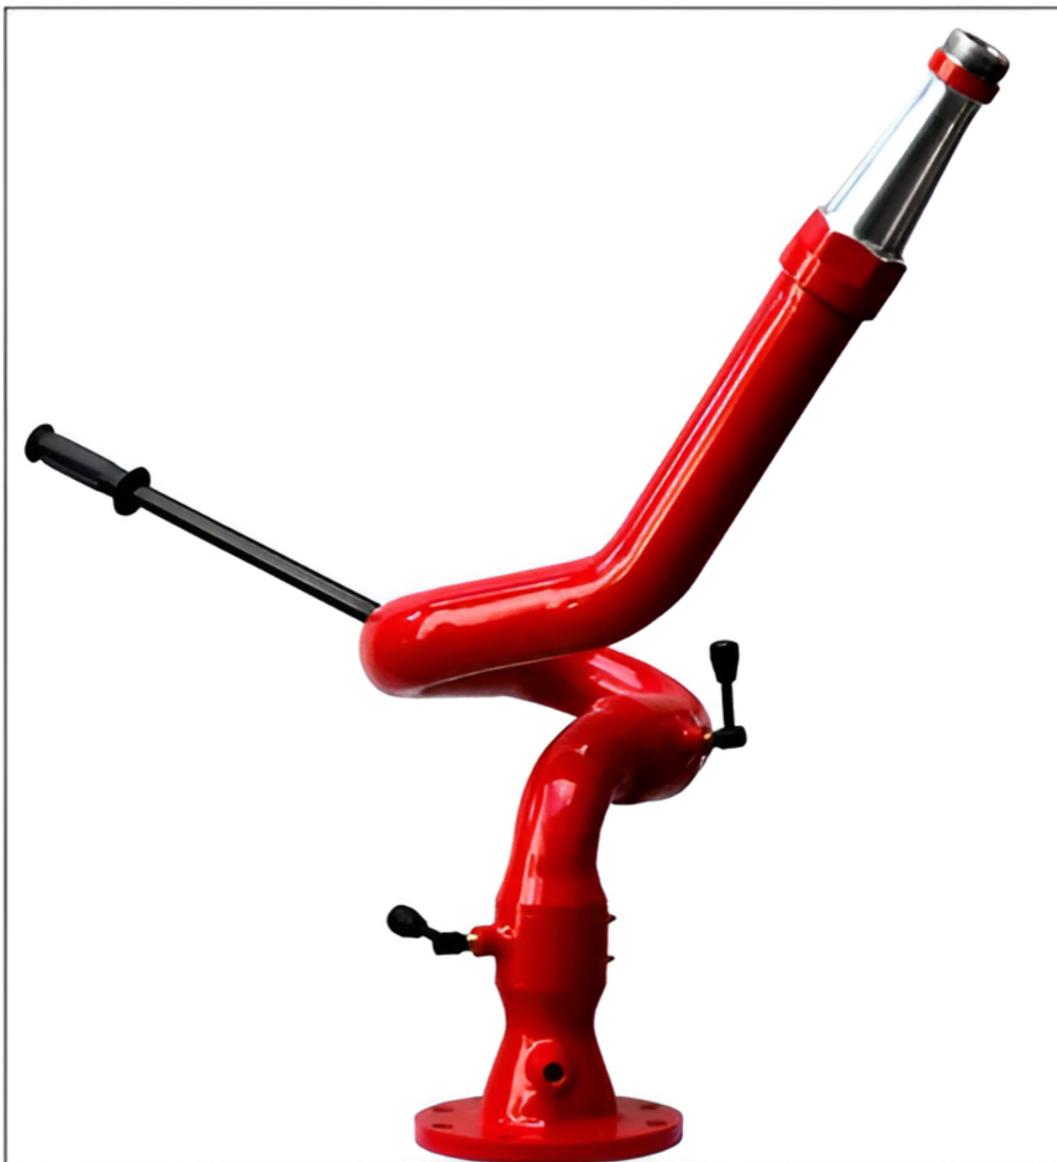

Model	Operating Pressure Range Kg/cm <sup>2</sup>	Flow Range lpm	Inlet Flange NB	Barrel Size/ Nozzle Bore Dia NB	Performance	
					Flow lpm	Range Mtrs.
M63	6 - 12	1500 - 2500	75/100	63/32	1750	55
M75	6 - 12	1800 - 3500	100	75/38	2580	62
M100	7 - 12	2500 - 5500	150	100/45	3750	67