
TECHNICAL DATASHEET OF WALL MOUNTED SWING TYPE HOSE REEL





Hose Reel Drum		
Size	19mm & 25mm	
Reference Standard	IS: 884	
Material of Constructon	M.S. 18 SWG	
Inlet	Threaded	
Hose	Thermoplastc / Rubber Braided Hose Pipe As Per IS: 444 / IS: 12585 (Type I / Type II)	
Length Of Hose	30 Mtr / 36 Mtr / 40 Mtr	
Outlet	Shut Off Nozzle / Jet and Spray Type Nozzle	
Material of Constructon For Nozzle	Gun Metal / Brass Jet Type Nozzle	
Approval	BIS (ISI Marked) for Hose Reel Hose Only	




TECHNICAL DATASHEET OF WALL MOUNTED SWING TYPE HOSE REEL

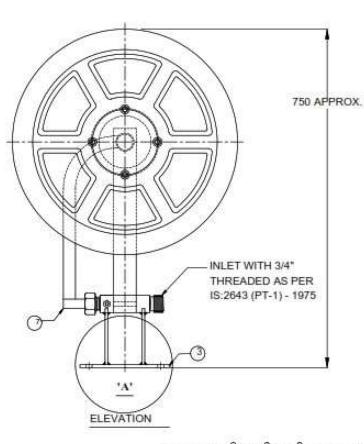

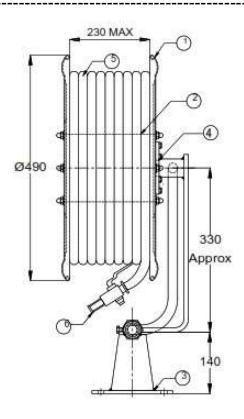

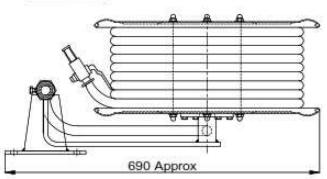



CLOSED VIEW

NOTES

- # ALL DIMENSIONS ARE IN MM.
- # TOLERANCE WHERENOT SPECIFIED SHALL BE ± 10 MM.
- # HYDRO TEST 21 Kg/cm2 FOR 5 MIN (FOR DRUM ONLY)
- # FLOW TEST 24 LPM MIN.@ 7Kg/ cm2 , 1/PER LOT
- # THROW HORIZONTAL JET 6 MTRS. MIN. @7KG/cm2
- # PAINTING POWDER COATED TO P.O. RED

NO.	DESCRIPTION	
1	SIDES	
2	HUB	
3	WALL BRACKET	
4	SWIVEL JOINT	
5	HOSE REEL TUBING	
6	NOZZLE	
.7	PIPE WITH FITTING	





TECHNICAL DATASHEET OF WALL MOUNTED SWING TYPE HOSE REEL

TECHNICAL DATA SHEET FOR HOSE REEL (WALL MOUNTING SWINGING TYPE)			
Item	Wall Mounted Swinging Type Hose Reel		
SR.NO.	PARAMETERS	SPECIFICATIONS	
1	General Specification		
1.1	Manufacturer	NEW ENGINEERING CORPORATION	
1.2	Туре	Wall Mounted Swinging (180 ^o Manual)	
1.3	Inlet Size	3/4" BSP. (M) Threaded	
1.4	Ref. Standard	IS: 884	
1.5	Brand / Make	INTIME	
2	Material of construction		
2.1	Side Reel	M.S. Sheet	
2.2	Arm, Wall Mounting bracket	M.S. Sheet	
2.3	Hose (20mm x 40 Mtrs. Long)	Thermoplastic, IS: 12585, Type-2	
2.4	Shut Off Nozzle with shutoff cock (5mm Bore)	S.S. 304/ PVC	
3	Hydrostatic Test Pressure		
3.1	Hose reel without Hose	21 Kg/cm2 for 5 Minutes	
4	Performance at 7 Kg/cm2		
4.1	Flow	24 Lpm min.	
4.2	Water Jet Throw	6 Mtrs.	
5	Painting	Painted with Fire Red Shade 536 of IS:5.	
6	Marking	Mfg. Name, Sr. No., Make, Year of Mfg., Size	