

3 AA BATTERIES

XPP-5420GXA

INTRINSICALLY SAFE FLASHLIGHT

NIGHTSTICK®
Life Depends on Light



IP-67
DUST/WATER
PROOF

ATEX
ZONE 0
IECEx

**CLASS I
DIV 1**



Large, textured button



Durable polymer body is
impact & chemical resistant



Sharp focused flashlight beam

CERTIFIED



210 LUMENS

INTRINSICALLY SAFE FLASHLIGHT

3 AA BATTERIES (not included)

ITEM NUMBER/UPC

- XPP-5420GXA, UPC 0 1739880810 1

MARKET APPLICATIONS

- Hazardous work environments, industrial, fire and rescue

CERTIFICATIONS

- cETLus, ATEX, IECEx, CE, InMetro, KOSHA, UKCA

CASE MATERIAL

- Engineered polymer

FLASHLIGHT LUMENS/RUNTIME

- 210L, 14 hrs. runtime

CANDELA

- 7,970

BEAM DISTANCE

- 187 m

WATER RATING

- ANSI IP-67 dustproof / waterproof

DROP RATING

- 2 meters

DIMENSIONS

- LENGTH: 7.0 in (178 mm)
- HANDLE DIAMETER: 1.1 in x 1.5 in (28 mm x 38 mm)
- HEAD DIAMETER: 1.8 in (46 mm)
- WEIGHT: 7.3 oz (207 g)

POWER SOURCE


- AA batteries (not included)

WARRANTY

- Limited lifetime

WHAT'S INCLUDED

- Flashlight
- Removable lanyard
- Instruction manual

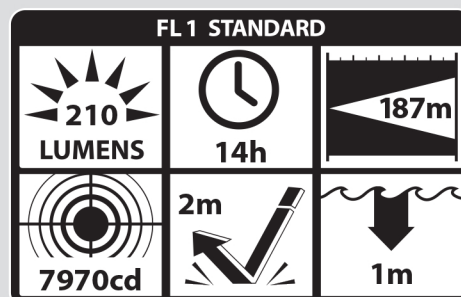

Bayco Products, Inc.
640 S. Sanden Blvd.
Wylie, TX 75098

XPP-5420GXA



Intertek



UK CA 0359



21-AV4BO-0137X

ID 4003544
INTRINSICALLY SAFE
SECURITE INTRINSEQUE



CLASS I DIV 1 GRPS A-D T3
CLASS II & III DIV 1 GRPS E-G T135C
CLASS I ZONE 0 AEx ia IIC T3 Ga
CLASS I ZONE 0 Ex ia IIC T3 Ga
Ⓢ I M 1 Ex ia op is I Ma
Ⓢ II 1 G Ex ia op is IIC T3 Ga

Conforms to:

ANSI/UL STD 913, ANSI/UL
60079-0, ANSI/UL 60079-11
ANSI/ISA 60079-26



Ex ia op is I Ma
Ex ia op is IIC T3 Ga
Intertek ITS 13 ATEX 27837X
ITS21UKEX0264X
IECEx ITS 16.0067X
-20°C ≤ Tamb ≤ +40°C
1.5V/Cell AA Alkaline

Certified to:

CAN/CSA STD C22.2 No 157
CAN/CSA STD C22.2 No 60079-0
CAN/CSA STD C22.2 No 60079-11
CSA STD C22.2 No 25

⚠ SEE INSTRUCTION MANUAL
VOIR MANUEL

MFG MM-YY

CERTIFIED



THADHANI[®]
The Experts in Safety... Since 1947

J.THADHANI & CO.

New #12/ Old #28, Stringers Street,
Chennai - 600001, Tamilnadu, India.



044 - 4262 5223



info@thadhanisafety.com



www.thadhanisafety.com