



BL05
Safety Lanyard

STANDARD : CONFORMING TO EN 354:2010, EN 355:2002 CE

INDUSTRY	IDEAL APPLICATIONS
-	Work At Height
-	Fall Arrest


SPECIAL FEATURES	
 LIGHT WEIGHT	 FALL RESTRAINT

ROPE MATERIAL
10.5mm Kernmantle Rope Alloy Metal

FEATURES
Energy Absorbing Single Braided Rope Lanyard
With one side EASY 308 karabiner and other side EASY SH 60 scaffolding hooks.

CLEANING
Use clean piece of cloth to wipe the dust

PACKING
10 pieces per carton

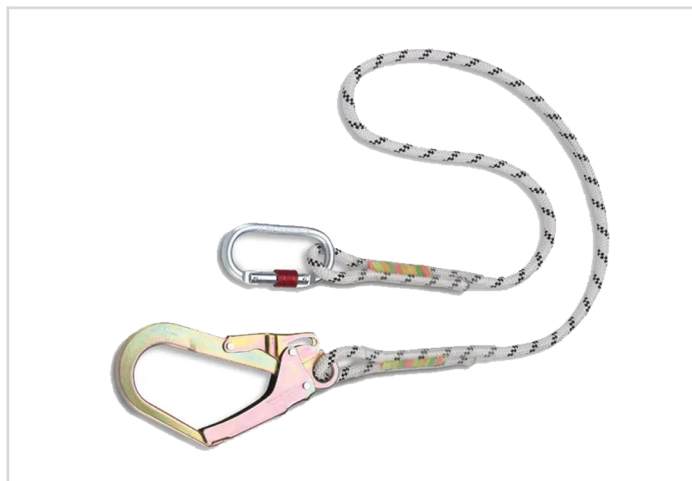

STITCHING THREAD
High Tenacity Virgin Multifilament Polyester

BREAKING STRENGTH	LANYARD LENGTH
23kN (Min)	2 mtr (Hook to Hook)

MARKINGS
Manufacturers Logo, details & mailing address
Model No., Batch No., Serial No.
Year of Manufacture
Material
Approvals & CE
Instruction Pictogram

STORAGE
Store the harness in a dry area away from ultraviolet rays.
Do not store in direct / high heat or sunlight as this may distort the Colour.
Can be stored and transported in their original cartons to avoid corrosion due to atmospheric moisture, excessive heat or cold.