


TWL22
Safety Lanyard

STANDARD : CERTIFIED TO ANSI Z359.13-2013, EN 354:2010, EN 355:2002 

INDUSTRY	IDEAL APPLICATIONS
-	Work At Height
-	Fall Arrest
-	Rescue

SPECIAL FEATURES



LIGHT WEIGHT



FALL RESTRAINT

ROPE MATERIAL

44m (+/- 1mm) wide Polyester Webbing

FEATURES

Energy Absorbing Double Webbing Lanyard with tie-back D-rings

Forged Steel snap hooks at both the ends

Hooks & Carabiners made of Alloy steel, conforming to EN362


Light Weight & High Strength Lanyard

CLEANING

Use clean piece of cloth to wipe the dust

PACKING

10 pieces per carton

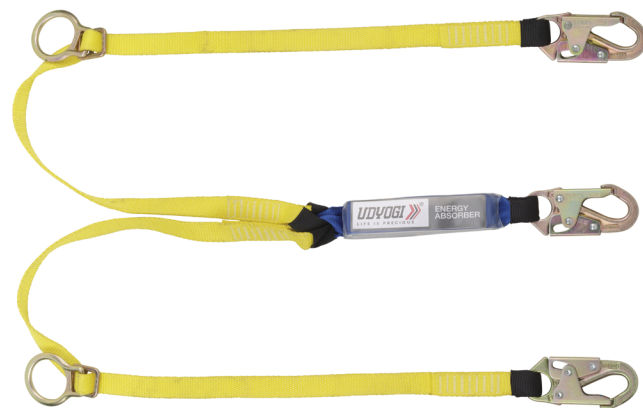

STITCHING THREAD

High Tenacity Virgin Multifilament Polyester

BREAKING STRENGTH

23kN (Min)

LANYARD LENGTH

1.8 mm (Hook to Hook)

MARKINGS

Manufacturers Logo, details & mailing address

Model No., Batch No., Serial No.

Year of Manufacture

Material

Approvals & CE

Instruction Pictogram

STORAGE

Store the harness in a dry area away from ultraviolet rays.

Do not store in direct / high heat or sunlight as this may distort the Colour.

Can be stored and transported in their original cartons to avoid corrosion due to atmospheric moisture, excessive heat or cold.